

ENYCASE®

HENSEL

HENSEL


PASSION FOR POWER.

	Types	
	Color: grey	Color: black
with terminal, 5-pole for Cu conductors		
1.5-2.5 mm ²	KF 0202 G KF 0402 G	KF 0202 B KF 0402 B
1.5-4 mm ²	KF 0404 G KF 0604 G	KF 0404 B KF 0604 B
2.5-6 mm ²	KF 0606 G KF 1006 G	KF 0606 B KF 1006 B
4-10 mm ²	KF 1010 G KF 1610 G	KF 1010 B KF 1610 B
6-16 mm ²	KF 1616 G	KF 1616 B
10-25 mm ²	KF 2525 G	KF 2525 B

	Types	
	Color: grey	Color: black
without terminal		
	KF 0200 G	KF 0200 B
	KF 0400 G	KF 0400 B
	KF 0600 G	KF 0600 B
	KF 1000 G	KF 1000 B
	KF 1600 G	KF 1600 B
	KF 2500 G	KF 2500 B
	KF 3500 G	KF 3500 B
	KF 5000 G	KF 5000 B

	Types	
	Color: grey	Color: black
without terminal, without knockouts		
	KF 0200 H	KF 0200 C
	KF 0400 H	KF 0400 C
	KF 0600 H	KF 0600 C
	KF 1000 H	KF 1000 C
	KF 1600 H	KF 1600 C
	KF 2500 H	KF 2500 C
	KF 3500 H	KF 3500 C
	KF 5000 H	KF 5000 C

Product range

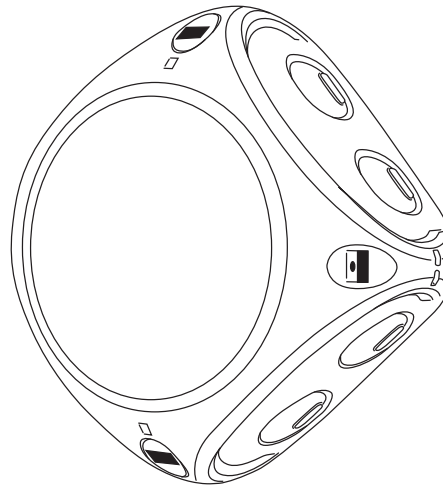

Gustav HENSEL GmbH & Co. KG
Industrial Electrical Power Distribution Systems


Allenhundern
Gustav-Hensel-Straße 6
D-57368 Lemmestadt
Germany
P.O. Box 1461
D-57344 Lemmestadt, Germany
Phone: +49 (0)27 23/6 09-0
Fax: +49 (0)27 23/6 00 52
E-Mail: info@hensel-electric.de
www.hensel-electric.de

98 17 1039 01.16/2/11

made in GERMANY since 1931

Robust and waterproof! Cable Junction Boxes for Offshore-Applications

Degree of protection: IP 66 / IP 67 / IP 69
Saltwater-proof
UV-resistant

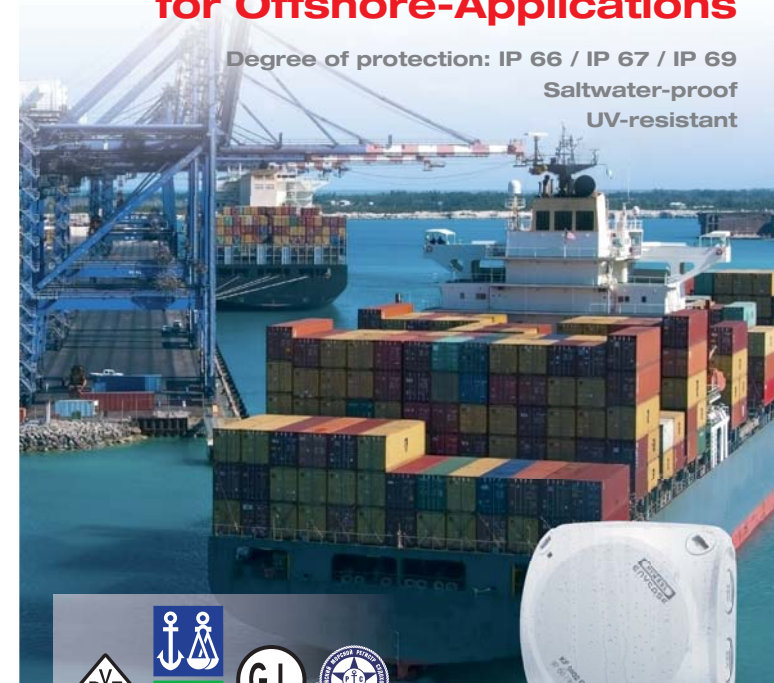

ENYCASE®



HENSEL



ENYCASE®
High quality material for offshore applications

- Degree of protection: IP 66 / IP 67 / IP 69
- Material: Polycarbonate
- Saltwater-proof
- UV resistant
- Temporary submersion up to 1 meter, max. 15 minutes



- VDE approved
- DNV GL - Certificate-No.: TAE00000EE
- Russian Maritime Register of Shipping, Documentation-No. 250-A-1180-108795



- Significant weight reduction compared to boxes made of sheet steel or brass
- Impact strength IK09 (10 Joule)



- Glow wire test according to IEC 60695-2-11: 960 °C
- UL Subject: V-0 flame-retardant, self-extinguishing
- halogen-free, silicone-free: low toxicity, low fume development

Modern terminal technology
 innovative and flexible solutions



- Different terminal positions and fastening options
- 2 terminals - also of different sizes - can be fixed in cable junction boxes up to 10 mm²
- High-position terminals with more space for wiring - also with maximum conductor assembly



- All terminals with 2 clamping units per pole
- Various conductor cross sections
- Various conductor types - connection of solid and flexible conductors
- Several conductors can be connected in one pole and clamping unit
- Protected against self-loosening

ENYCASE®

Variable cable entry
 the appropriate solution for every application



- Multi-level knockouts for cable glands in different sizes
- Cable entry also possible from the rear side

External brackets, cover closes & labelling system
 perfectly equipped



- External brackets for fastening are always included
- Lid closes quickly by a quarter turn, open/closed position is visible
- Professional identification of the circuits (optional)